



**Features**

**Technical characteristics**

- Working pressure 10 bar
- Test pressure 13 bar
- Maximum operating temperature 110° C
- For NF certification  
see the website [www.marque-nf.com](http://www.marque-nf.com)

**Safety**

- Compact radiators cannot be inverted around any of the three axes.
- the sides of radiators are fastened with screws, safer than the interlocking system adopted on other panel radiators.

**Standard equipment**


- 4 x 1/2" connection, internal thread
- Superior grid
- Lateral side
- Brackets and supports
  - 4 welded supports up to and including a length of 1600mm; over this, 6 supports.

**Optional**

Brackets and optional accessories are available on dedicated pages.

**Connection**


Linear Compact radiators can be connected to a two-pipe installation with high/high same side, high/low opposite side or low/low opposite side connections. The two-pipe connection requires a valve and lockshield (not provided). It is also possible to connect them to a one-pipe installation with a single connection, using the flow deviator. A one-pipe valve is not provided.

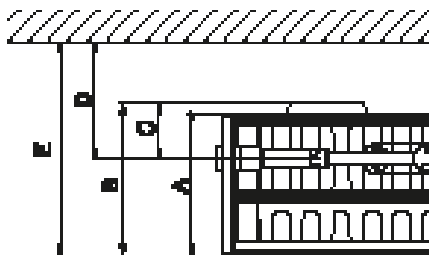


		Dimensions				
		10	20	21	22	33
panel depth - excluding back supports	A	64	67	86	101	158
total depth - from the back of the support to the front panel**	B	64	76	95	110	167
distance from the back support to the connection	C	-	42	51,5	59	59
distance from wall to the centre of the connection (mounting the radiators on the GB brackets provided)*	D	34	57/65	67/75	74/82	74/82
total distance from the wall to the front panel (panel mounted on the GP brackets provided as standard)*	E	69	90/98	109/117	124/132	181/189

\* The total distance varies according to whether the GB bracket is mounted in position A or position B (choice of depth), model 10 mounted on D30 brackets  
 \*\* Calculating the total size of the panel (from the wall to the front panel) with the chosen wall brackets: the useful length of the chosen bracket must be added to this measurement (see brackets page).

**Front view**

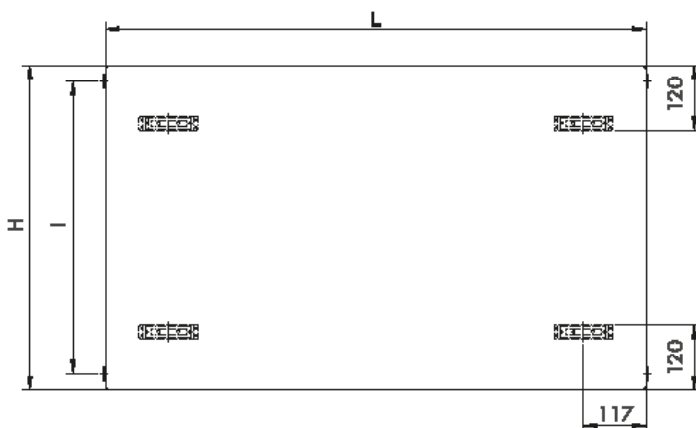

**Upper view**

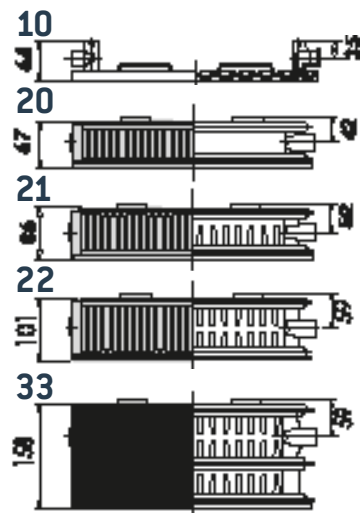

Height (H) 300 — Tappings centre (I) 240

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,301			1,327			1,244			1,292			1,288		
Length (mm)	Power Code	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power Code	112	90	58	198	160	101	306	250	162	383	310	198	565	458	293
		0182103012			0182203112			0182213112			0182223112			0182333112		
500	Power Code	140	113	72	248	200	126	382	312	202	479	388	247	707	572	366
		0182103015			0182203115			0182213115			0182223115			0182333115		
600	Power Code	167	136	86	298	240	151	459	375	243	574	465	296	848	687	439
		0182103018			0182203118			0182213118			0182223118			0182333118		
700	Power Code	195	158	101	347	280	176	535	437	283	670	543	346	989	801	512
		0182103021			0182203121			0182213121			0182223121			0182333121		
800	Power Code	223	181	115	397	320	202	611	499	324	766	620	395	1130	916	586
		0182103024			0182203124			0182213124			0182223124			0182333124		
900	Power Code	251	203	130	446	360	227	688	562	364	861	698	445	1272	1030	659
		0182103027			0182203127			0182213127			0182223127			0182333127		
1.000	Power Code	279	226	144	496	400	252	764	624	405	957	775	494	1413	1145	732
		0182103030			0182203130			0182213130			0182223130			0182333130		
1.100	Power Code	307	249	158	546	440	277	841	687	445	1053	853	543	1554	1259	805
		0182103033			0182203133			0182213133			0182223133			0182333133		
1.200	Power Code	335	271	173	595	480	302	917	749	486	1148	930	593	1696	1373	878
		0182103036			0182203136			0182213136			0182223136			0182333136		
1.400	Power Code	391	316	202	694	560	353	1070	874	567	1340	1085	692	1978	1602	1025
		0182103042			0182203142			0182213142			0182223142			0182333142		
1.600	Power Code	446	362	230	794	640	403	1223	999	648	1531	1241	790	2261	1831	1171
		0182103048			0182203148			0182213148			0182223148			0182333148		
1.800	Power Code	502	407	259	893	720	454	1376	1124	728	1723	1396	889	2543	2060	1318
		0182103054			0182203154			0182213154			0182223154			0182333154		
2.000	Power Code	558	452	288	992	800	504	1528	1249	809	1914	1551	988	2826	2289	1464
		0182103060			0182203160			0182213160			0182223160			0182333160		
2.300	Power Code	642	520	331	1141	919	580	1758	1436	931	2201	1783	1136	3250	2633	1684
		0182103069			0182203169			0182213169			0182223169			0182333169		
2.600	Power Code	725	588	374	1290	1039	655	1987	1623	1052	2488	2016	1284	3674	2976	1903
		0182103078			0182203178			0182213178			0182223178			0182333178		
3.000	Power Code	837	678	432	1488	1199	756	2293	1873	1214	2871	2326	1482	4239	3434	2196
		0182103090			0182203190			0182213190			0182223190			0182333190		

Height (H) 400 — Tappings centre (I) 340

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,315			1,297			1,252			1,294			1,295		
Length (mm)	Power Code	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power Code	138	111	70	254	206	131	382	311	201	478	387	247	696	565	360
		0182104012			0182204112			0182214112			0182224112			0182334112		
500	Power Code	172	139	88	318	258	164	477	389	251	597	484	309	871	706	450
		0182104015			0182204115			0182214115			0182224115			0182334115		
600	Power Code	206	167	106	382	309	197	572	467	302	716	581	370	1045	847	540
		0182104018			0182204118			0182214118			0182224118			0182334118		
700	Power Code	241	194	123	445	361	230	668	545	352	836	678	432	1219	988	630
		0182104021			0182204121			0182214121			0182224121			0182334121		
800	Power Code	275	222	141	509	412	262	763	623	402	955	774	494	1393	1130	719
		0182104024			0182204124			0182214124			0182224124			0182334124		
900	Power Code	310	250	158	572	464	295	859	700	453	1075	871	555	1567	1271	809
		0182104027			0182204127			0182214127			0182224127			0182334127		
1.000	Power Code	344	278	176	636	515	328	954	778	503	1194	968	617	1741	1412	899
		0182104030			0182204130			0182214130			0182224130			0182334130		
1.100	Power Code	378	305	194	700	567	361	1049	856	553	1313	1065	679	1915	1553	989
		0182104033			0182204133			0182214133			0182224133			0182334133		
1.200	Power Code	413	333	211	763	618	394	1145	934	604	1433	1161	740	2089	1694	1079
		0182104036			0182204136			0182214136			0182224136			0182334136		
1.400	Power Code	482	389	246	890	721	459	1335	1089	704	1672	1355	864	2437	1977	1259
		0182104042			0182204142			0182214142			0182224142			0182334142		
1.600	Power Code	550	444	282	1018	824	525	1526	1245	805	1910	1549	987	2786	2259	1439
		0182104048			0182204148			0182214148			0182224148			0182334148		
1.800	Power Code	619	500	317	1145	927	590	1717	1401	905	2149	1742	1111	3134	2541	1619
		0182104054			0182204154			0182214154			0182224154			0182334154		
2.000	Power Code	688	555	352	1272	1030	656	1908	1556	1006	2388	1936	1234	3482	2824	1799
		0182104060			0182204160			0182214160			0182224160			0182334160		
2.300	Power Code	791	638	405	1463	1185	754	2194	1790	1157	2746	2226	1419	4004	3247	2068
		0182104069			0182204169			0182214169			0182224169			0182334169		
2.600	Power Code	894	722	458	1654	1339	853	2480	2023	1308	3104	2517	1604	4527	3671	2338
		0182104078			0182204178			0182214178			0182224178			0182334178		
3.000	Power Code	1032	833	528	1908	1545	984	2862	2335	1509	3582	2904	1851	5223	4236	2698
		0182104090			0182204190			0182214190			0182224190			0182334190		

Height (H) 500 — Tappings centre (I) 440

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,329			1,266			1,261			1,296			1,301		
Length (mm)		Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power	165	133	84	307	250	161	456	371	239	569	462	294	823	666	423
	Code	0182105012			0182205112			0182215112			0182225112			0182335112		
500	Power	207	166	105	384	313	201	570	464	299	712	577	367	1029	833	529
	Code	0182105015			0182205115			0182215115			0182225115			0182335115		
600	Power	248	200	125	461	375	241	684	557	359	854	692	441	1235	999	635
	Code	0182105018			0182205118			0182215118			0182225118			0182335118		
700	Power	289	233	146	538	438	281	798	650	419	996	808	514	1441	1166	741
	Code	0182105021			0182205121			0182215121			0182225121			0182335121		
800	Power	330	266	167	614	500	322	912	743	479	1138	923	588	1646	1332	847
	Code	0182105024			0182205124			0182215124			0182225124			0182335124		
900	Power	372	299	188	691	563	362	1026	836	539	1281	1038	661	1852	1499	953
	Code	0182105027			0182205127			0182215127			0182225127			0182335127		
1.000	Power	413	333	209	768	625	402	1140	928	598	1423	1154	735	2058	1666	1059
	Code	0182105030			0182205130			0182215130			0182225130			0182335130		
1.100	Power	454	366	230	845	688	442	1254	1021	658	1565	1269	808	2264	1832	1165
	Code	0182105033			0182205133			0182215133			0182225133			0182335133		
1.200	Power	496	399	251	922	750	482	1368	1114	718	1708	1385	882	2470	1999	1270
	Code	0182105036			0182205136			0182215136			0182225136			0182335136		
1.400	Power	578	466	293	1075	876	563	1596	1300	838	1992	1615	1028	2881	2332	1482
	Code	0182105042			0182205142			0182215142			0182225142			0182335142		
1.600	Power	661	532	334	1229	1001	643	1824	1486	957	2277	1846	1175	3293	2665	1694
	Code	0182105048			0182205148			0182215148			0182225148			0182335148		
1.800	Power	743	599	376	1382	1126	724	2051	1671	1077	2561	2077	1322	3704	2998	1906
	Code	0182105054			0182205154			0182215154			0182225154			0182335154		
2.000	Power	826	665	418	1536	1251	804	2279	1857	1197	2846	2308	1469	4116	3331	2117
	Code	0182105060			0182205160			0182215160			0182225160			0182335160		
2.300	Power	950	765	481	1766	1438	925	2621	2136	1376	3273	2654	1690	4733	3831	2435
	Code	0182105069			0182205169			0182215169			0182225169			0182335169		
2.600	Power	1074	865	543	1997	1626	1045	2963	2414	1556	3700	3000	1910	5351	4330	2752
	Code	0182105078			0182205178			0182215178			0182225178			0182335178		
3.000	Power	1239	998	627	2304	1876	1206	3419	2785	1795	4269	3461	2204	6174	4997	3176
	Code	0182105090			0182205190			0182215190			0182225190			0182335190		

Height (H) 600 - Tappings centre (I) 540

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,343			1,236			1,269			1,298			1,307		
Length (mm)		Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power	195	157	98	358	292	190	530	466	277	659	534	340	949	766	486
	Code	0182106012			0182206112			0182216112			0182226112			0182336112		
500	Power	244	196	123	447	366	238	662	583	346	824	668	425	1186	957	607
	Code	0182106015			0182206115			0182216115			0182226115			0182336115		
600	Power	293	236	148	536	439	285	795	700	415	988	801	510	1423	1149	729
	Code	0182106018			0182206118			0182216118			0182226118			0182336118		
700	Power	342	275	172	626	512	333	927	816	485	1153	935	595	1660	1340	850
	Code	0182106021			0182206121			0182216121			0182226121			0182336121		
800	Power	390	314	197	715	585	380	1060	933	554	1318	1068	680	1898	1532	972
	Code	0182106024			0182206124			0182216124			0182226124			0182336124		
900	Power	439	353	221	805	658	428	1192	1049	623	1482	1202	765	2135	1723	1093
	Code	0182106027			0182206127			0182216127			0182226127			0182336127		
1.000	Power	488	393	246	894	731	475	1325	1166	692	1647	1335	850	2372	1915	1215
	Code	0182106030			0182206130			0182216130			0182226130			0182336130		
1.100	Power	537	432	271	983	804	523	1457	1283	762	1812	1469	935	2609	2106	1336
	Code	0182106033			0182206133			0182216133			0182226133			0182336133		
1.200	Power	586	471	295	1073	877	570	1589	1399	831	1976	1603	1020	2846	2298	1457
	Code	0182106036			0182206136			0182216136			0182226136			0182336136		
1.400	Power	683	550	344	1252	1024	665	1854	1632	969	2306	1870	1190	3321	2681	1700
	Code	0182106042			0182206142			0182216142			0182226142			0182336142		
1.600	Power	781	628	394	1430	1170	760	2119	1866	1108	2635	2137	1360	3795	3064	1943
	Code	0182106048			0182206148			0182216148			0182226148			0182336148		
1.800	Power	878	707	443	1609	1316	855	2384	2099	1246	2965	2404	1530	4270	3447	2186
	Code	0182106054			0182206154			0182216154			0182226154			0182336154		
2.000	Power	976	785	492	1788	1462	950	2649	2332	1385	3294	2671	1700	4744	3830	2429
	Code	0182106060			0182206160			0182216160			0182226160			0182336160		
2.300	Power	1122	903	566	2056	1682	1093	3046	2682	1593	3788	3072	1954	5456	4404	2793
	Code	0182106069			0182206169			0182216169			0182226169			0182336169		
2.600	Power	1269	1021	640	2324	1901	1235	3444	3032	1800	4282	3472	2209	6167	4978	3158
	Code	0182106078			0182206178			0182216178			0182226178			0182336178		
3.000	Power	1464	1178	738	2682	2193	1425	3974	3498	2077	4941	4006	2549	7116	5744	3644
	Code	0182106090			0182206190			0182216190			0182226190			0182336190		

Height (H) 700 - Tappings centre (I) 640

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,307			1,250			1,276			1,309			1,316		
Length (mm)	Power Code	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power Code	229	185	117	405	331	214	604	491	315	747	605	383	1074	867	548
		0182107012			0182207112			0182217112			0182227112			0182337112		
500	Power Code	286	231	147	507	413	268	755	614	393	934	756	479	1343	1084	685
		0182107015			0182207115			0182217115			0182227115			0182337115		
600	Power Code	343	277	176	608	496	321	906	736	472	1121	907	575	1611	1301	823
		0182107018			0182207118			0182217118			0182227118			0182337118		
700	Power Code	400	324	205	709	579	375	1057	859	551	1308	1058	671	1880	1518	960
		0182107021			0182207121			0182217121			0182227121			0182337121		
800	Power Code	458	370	235	810	661	428	1208	982	629	1494	1210	767	2148	1734	1097
		0182107024			0182207124			0182217124			0182227124			0182337124		
900	Power Code	515	416	264	912	744	482	1359	1105	708	1681	1361	863	2417	1951	1234
		0182107027			0182207127			0182217127			0182227127			0182337127		
1.000	Power Code	572	462	293	1013	827	535	1510	1227	787	1868	1512	958	2685	2168	1371
		0182107030			0182207130			0182217130			0182227130			0182337130		
1.100	Power Code	629	509	323	1114	909	589	1661	1350	865	2055	1663	1054	2954	2385	1508
		0182107033			0182207133			0182217133			0182227133			0182337133		
1.200	Power Code	686	555	352	1216	992	642	1812	1473	944	2242	1814	1150	3222	2602	1645
		0182107036			0182207136			0182217136			0182227136			0182337136		
1.400	Power Code	801	647	411	1418	1157	749	2114	1718	1102	2615	2117	1342	3759	3035	1919
		0182107042			0182207142			0182217142			0182227142			0182337142		
1.600	Power Code	915	740	469	1621	1323	856	2416	1964	1259	2989	2419	1534	4296	3469	2193
		0182107048			0182207148			0182217148			0182227148			0182337148		
1.800	Power Code	1030	832	528	1823	1488	963	2718	2209	1416	3362	2722	1725	4833	3902	2468
		0182107054			0182207154			0182217154			0182227154			0182337154		
2.000	Power Code	1144	925	587	2026	1653	1070	3020	2454	1574	3736	3024	1917	5370	4336	2742
		0182107060			0182207160			0182217160			0182227160			0182337160		
2.300	Power Code	1316	1063	675	2330	1901	1231	3473	2823	1810	4296	3478	2204	6176	4986	3153
		0182107069			0182207169			0182217169			0182227169			0182337169		
2.600	Power Code	1487	1202	762	2634	2149	1391	3926	3191	2046	4857	3931	2492	6981	5637	3564
		0182107078			0182207178			0182217178			0182227178			0182337178		
3.000	Power Code	1716	1387	880	3039	2480	1605	4530	3682	2360	5604	4536	2875	8055	6504	4113
		0182107090			0182207190			0182217190			0182227190			0182337190		

Height (H) 900 - Tappings centre (I) 840

		10			20			21			22			33		
Width (mm)		64			67			86			101			158		
Exponent (n)		1,235			1,278			1,303			1,331			1,333		
Length (mm)	Power Code	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20	Output 75/65-20	Output 70/55-20	Output 55/45-20
		W	W	W	W	W	W	W	W	W	W	W	W	W	W	W
400	Power Code	307	251	163	494	401	257	756	610	388	922	744	468	1327	1068	672
		0182109012			0182209112			0182219112			0182229112			0182339112		
500	Power Code	384	314	204	617	501	321	945	763	484	1153	930	585	1659	1335	839
		0182109015			0182209115			0182219115			0182229115			0182339115		
600	Power Code	460	376	245	740	602	385	1134	915	581	1384	1116	702	1991	1602	1007
		0182109018			0182209118			0182219118			0182229118			0182339118		
700	Power Code	537	439	286	864	702	449	1323	1068	678	1614	1302	819	2323	1870	1175
		0182109021			0182209121			0182219121			0182229121			0182339121		
800	Power Code	614	502	326	987	802	514	1512	1220	775	1845	1488	936	2654	2137	1343
		0182109024			0182209124			0182219124			0182229124			0182339124		
900	Power Code	690	564	367	1111	902	578	1701	1373	872	2075	1675	1053	2986	2404	1511
		0182109027			0182209127			0182219127			0182229127			0182339127		
1.000	Power Code	767	627	408	1234	1003	642	1890	1525	969	2306	1861	1170	3318	2671	1679
		0182109030			0182209130			0182219130			0182229130			0182339130		
1.100	Power Code	844	690	449	1357	1103	706	2079	1678	1066	2537	2047	1287	3650	2938	1847
		0182109033			0182209133			0182219133			0182229133			0182339133		
1.200	Power Code	920	753	490	1481	1203	770	2268	1831	1163	2767	2233	1404	3982	3205	2015
		0182109036			0182209136			0182219136			0182229136			0182339136		
1.400	Power Code	1074	878	571	1728	1404	899	2646	2136	1357	3228	2605	1638	4645	3739	2350
		0182109042			0182209142			0182219142			0182229142			0182339142		
1.600	Power Code	1227	1003	653	1974	1604	1027	3024	2441	1550	3690	2977	1873	5309	4273	2686
		0182109048			0182209148			0182219148			0182229148			0182339148		
1.800	Power Code	1381	1129	734	2221	1805	1156	3402	2746	1744	4151	3349	2107	5972	4807	3022
		0182109054			0182209154			0182219154			0182229154			0182339154		
2.000	Power Code	1534	1254	816	2468	2005	1284	3780	3051	1938	4612	3721	2341	6636	5342	3358
		0182109060			0182209160			0182219160			0182229160			0182339160		
2.300	Power Code	1764	1442	938	2838	2306	1477	4347	3509	2229	5304	4279	2692	7631	6143	3861
		0182109069			0182209169			0182219169			0182229169			0182339169		
2.600	Power Code	1994	1631	1061	3208	2607	1669	4914	3966	2519	5996	4838	3043	8627	6944	4365
		0182109078			0182209178			0182219178			0182229178			0182339178		
3.000	Power Code	2301	1881	1224	3702	3008	1926	5670	4576	2907	6918	5582	3511	9954	8012	5036
		0182109090			0182209190			0182219190			0182229190			0182339190		