

Combined towel warmer Elegance H-Flow

Ø 25 — P 41



Code	Height H (mm)	Length L (mm)	Width	N. flat tubes	Resa Δt 50 °C 75/65-20 W	Exp. n	Electric towel warmer Power W	Fan heater Power W	Empty weight (kg)	Water content (l)
------	---------------	---------------	-------	---------------	--------------------------	--------	-------------------------------	--------------------	-------------------	-------------------

white or coloured without plug

OSDRMDx080855S5	890	550	143	17	428	1,23	500	1000	6,5	4,8
OSDRMDx011155S7	1225	550	143	21	588	1,24	700	1000	9,1	6,5
OSDRMDx011655S1	1717	550	143	31	803	1,25	1000	1000	13,5	9,5

x = 0 : white / x = 9 : coloured / x = 3 : anthracite

The electric output is equal to the thermal output at operating mode.

Features

Technical characteristics

- Pipes diameter 25 mm
- Pipes distance 41 mm
- Semi-oval collectors 40x30 mm
- Mains electricity supply: 230 V AC, 50Hz
- Class 2, IP24

Standard equipment

- Fan, 1000W
- Remote control
- Kit of 4 brackets
- Valve and lockshield valve

Special version

- Elegance hot water: available
- Elegance electric: available
- Chromed version: not available
- Coloured version: available

Functions

Elegance H-Flow has the following operating mode:

- electric towel warmer
- idronic towel warmer
- fan
- electric towel warmer and fan
- idronic towel warmer and fan

The towel warmer has five functions):

- **Comfort mode:** the chosen temperature is regulated by the remote control
- **Night mode:** the electric towel warmer is regulated at 2 °C below comfort temperature
- **Pilot wire mode:** the electric towel warmer can be adjusted remotely through a central electric radiator regulation system (mode available only in homes fitted with such a system)
- **Timer mode:** using the remote control, the on and off times of the towel warmer can be programmed hour by hour for the seven days of the week
- **Two hour override function:** when this function is activated, the radiator operates at maximum power for two hours to heat the room rapidly.
- **Freeze prevention function:** when the dial is on minimum, the towel warmer comes on automatically when room temperature drops below 7 °C.

Electric installation

- The radiator must be installed outside zone 1 (bathroom)
- The switch/electronic control must be in zone 3 (bathroom)
- For safety reasons, the radiator must not be installed beneath a mains socket
- Turning a towel warmer by 180° is not possible
- Every towel warmer has to be installed frontally, and the thermostat has to lie on the lower-right position



Remote control included

COLOUR SCHEME

PRODUCT	FAN	REMOTE CONTROL	BRACKETS
white	white	white	white
coloured	black	anthracite	anthracite
anthracite	black	anthracite	anthracite

Optional

Thermostatic head

Optional code 5580106700

Spare parts

Brackets



XTB brackets included

Spare part code 550S010400

white

Remote control




included

Spare part code 5525010712

white

Spare part code 5525010722

anthracite

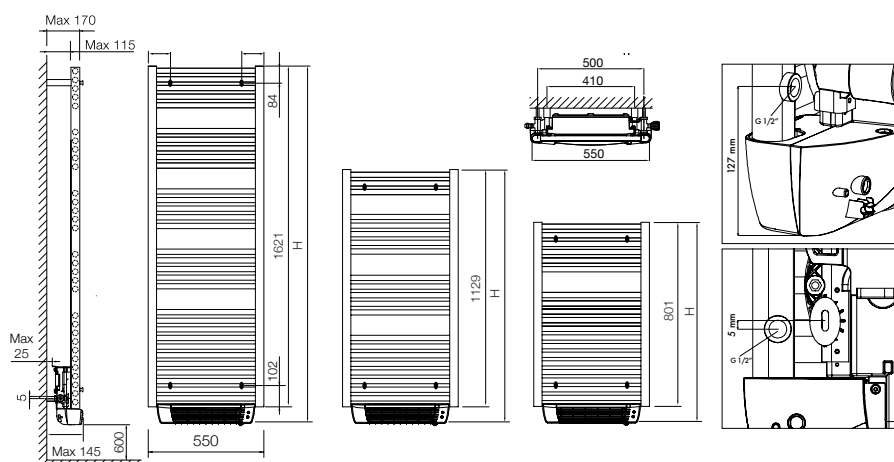

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate (regarding tubes and of the "openings" between the tubes themselves)