

Code	Height H (mm)	Length L (mm)	Tappings centre I (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
White or coloured												
OSDRxxy08084500	801	450	400	30	17	355	269	189	1,232	5,7	3,5	300
OSDRxxy08085000	801	500	450	30	17	392	298	209	1,232	6,2	3,8	300
OSDRxxy08085500	801	550	500	30	17	355	326	228	1,232	6,7	4,1	400
OSDRxxy01114500	1129	450	400	30	21	489	370	258	1,249	8,5	5,2	400
OSDRxxy01115000	1129	500	450	30	21	539	408	285	1,247	9,3	5,6	700
OSDRxxy01115500	1129	550	500	30	21	588	445	311	1,244	10,0	6,0	700
OSDRxxy01116000	1129	600	550	30	21	637	483	338	1,241	10,8	6,4	700
OSDRxxy01144500	1457	450	400	30	27	630	477	333	1,247	11,1	16,9	700
OSDRxxy01145000	1457	500	450	30	27	691	523	365	1,247	12,1	15,7	700
OSDRxxy01145500	1457	550	500	30	27	752	569	398	1,247	13,0	14,6	700
OSDRxxy01146000	1457	600	550	30	27	813	615	430	1,246	14,0	13,4	1000
OSDRxxy01174500	1744	450	400	30	34	740	562	395	1,227	13,5	8,3	700
OSDRxxy01175000	1744	500	450	30	34	809	615	432	1,228	14,8	9,0	1000
OSDRxxy01176000	1744	600	550	30	34	948	721	506	1,230	17,5	10,3	1000
OSDRxxy01177500	1744	750	700	30	34	1157	879	617	1,232	21,4	12,2	1500

y = 0 : white / y = 9 : coloured

*max electric heating element power suitable for this size

Code	Height H (mm)	Length L (mm)	Tappings centre I (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
Chromed												
OSDRCL108084500	801	450	400	30	17	240	182	127	1,241	5,7	3,5	300
OSDRCL108085000	801	500	450	30	17	263	199	139	1,241	6,2	3,8	300
OSDRCL108085500	801	550	500	30	17	286	217	152	1,242	6,7	4,1	300
OSDRCL101114500	1129	450	400	30	21	333	251	174	1,267	8,5	5,2	300
OSDRCL101115000	1129	500	450	30	21	366	276	192	1,267	9,3	5,6	300
OSDRCL101115500	1129	550	500	30	21	399	301	209	1,265	10,0	6,0	400
OSDRCL101116000	1129	600	550	30	21	431	325	226	1,263	10,8	6,4	400
OSDRCL101144500	1457	450	400	30	27	423	318	220	1,282	11,1	16,9	400
OSDRCL101145000	1457	500	450	30	27	466	350	243	1,280	12,1	15,7	400
OSDRCL101145500	1457	550	500	30	27	509	383	265	1,277	13,0	14,6	700
OSDRCL101146000	1457	600	550	30	27	553	416	288	1,274	14,0	13,4	700
OSDRCL101174500	1744	450	400	30	34	473	356	247	1,273	13,5	8,3	400
OSDRCL101175000	1744	500	450	30	34	523	394	273	1,271	14,8	9	700
OSDRCL101176000	1744	600	550	30	34	623	470	326	1,266	17,45	10,25	700
OSDRCL101177500	1744	750	700	30	34	777	583	406	1,259	21,4	12,2	1000

*max electric heating element power suitable for this size

Codes - choice of the connections

(standard, central, sides for Elegance Linea white and coloured version)

xx = CL >> standard connection	xx = LC >> side connection TC 500 mm
xx = CR >> side connection opposite sides	xx = LN >> side connection TC 900 mm
xx = AD >> central connection TC 50 mm	xx = LS >> side connection TC on demand

Example: OSDRAD901146000 = Elegance Linea coloured H1457, L600, central connection
OSDRCL001146000 = Elegance Linea white H1457, L600, standard connection

COLOUR SCHEME

PRODUCT BRACKETS

white	white
coloured	chromed
chromed	chromed

Spare parts

Brackets



XTB Brackets included

Spare part code 99AT0032 white
Spare part code 99AT0043 chromed

Features

Technical characteristics


- Pipes Ø25 mm
- Semi-oval collectors 40x30 mm
- Pipes distance 41 mm
- Max working pressure = 10 bar
- Test pressure = 13 bar
- Max working temperature = 110°C
- For NF certification, see www.certita.fr

Standard equipment

- 3 x 1/2" connections, internal thread (two bottom connections, one top connection)
- 1/2" air vent
- Kit of 3 brackets

Special Versions

- Electric Elegance Linea: available
- Electrification kit (for mixed use) available on request: kit with ON/OFF switch (class 1) and Schuko plug; kit with analogue (class 2) or digital (class 2) room thermostat and remote control unit (a kit with heating element only is also available) - the maximum outputs of the kit for each size are given in the table on the facing page
- Chromed product: available
- Coloured version: available
- One-pipe system (see Technical Info pages): yes
- Central connection: available, with 1/2" connections and tappings centre 50mm internal thread only for Elegance Linea white and coloured
- Side connections: available with both opposite-side connections, side connections same side tappings centre 500mm, side connections same side tappings centre 900mm, side connections with on-demand tappings centre (all connections are 1/2", internal thread) only for Elegance Linea white and coloured
- Room divider fixing kit: available
- Valve and lockshield-valve are to be ordered separately

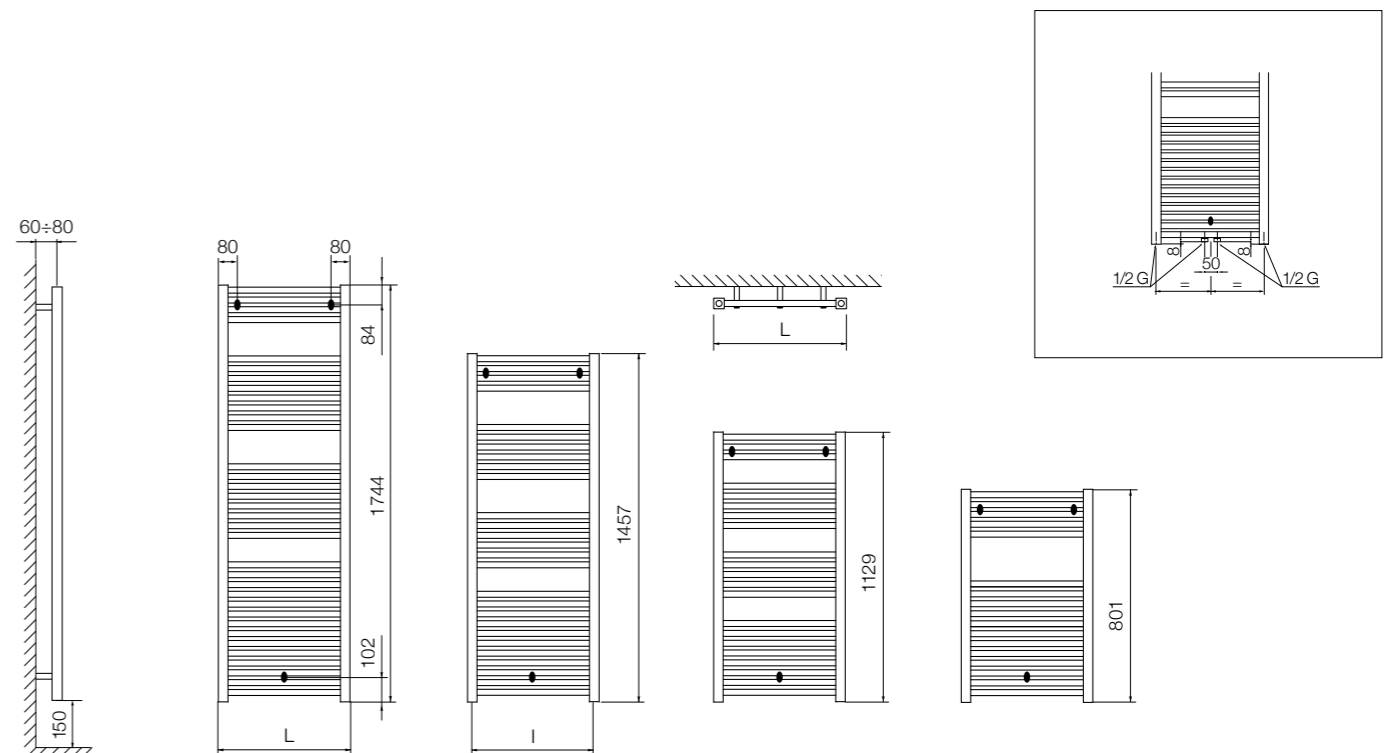

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate (regarding tubes and of the "openings" between the tubes themselves)