

Code	Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
------	---------------	---------------	------------------------	-------	---------------	-----------------------------	-----------------------------	-----------------------------	--------	-------------------	-------------------	---------------------------

White or coloured

OSDRxxxy08084500	801	450	400	57	17	355	269	189	1,232	5,7	3,5	300
OSDRxxxy08085000	801	500	450	57	17	392	298	209	1,232	6,2	3,8	300
OSDRxxxy01114500	1129	450	400	57	21	489	370	258	1,249	8,5	5,2	400
OSDRxxxy01115000	1129	500	450	57	21	539	408	285	1,247	9,3	5,6	700
OSDRxxxy01116000	1129	600	550	58	21	637	483	338	1,241	10,8	6,4	700
OSDRxxxy01144500	1457	450	400	57	27	630	477	333	1,247	11,1	16,9	700
OSDRxxxy01145000	1457	500	450	57	27	691	523	365	1,247	12,1	15,7	700
OSDRxxxy01146000	1457	600	550	58	27	813	615	430	1,246	14,0	13,4	1000
OSDRxxxy01174500	1744	450	400	57	34	740	562	395	1,227	13,5	8,3	700
OSDRxxxy01175000	1744	500	450	57	34	809	615	432	1,228	14,8	9,0	1000
OSDRxxxy01176000	1744	600	550	58	34	948	721	506	1,230	17,5	10,3	1000
OSDRxxxy01177500	1744	750	700	63	34	1157	879	617	1,232	21,4	12,2	1500

y = 0 : white / y = 9 : coloured

*max electric heating element power suitable for this size

Code	Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance (W) *
------	---------------	---------------	------------------------	-------	---------------	-----------------------------	-----------------------------	-----------------------------	--------	-------------------	-------------------	---------------------------

Chromed

OSDR0L108084500	801	450	400	57	17	240	182	127	1,241	5,7	3,5	300
OSDR0L108085000	801	500	450	57	17	263	199	139	1,241	6,2	3,8	300
OSDR0L101114500	1129	450	400	57	21	333	251	174	1,267	8,5	5,2	300
OSDR0L101115000	1129	500	450	57	21	366	276	192	1,267	9,3	5,6	300
OSDR0L101116000	1129	600	550	58	21	431	325	226	1,263	10,8	6,4	400
OSDR0L101144500	1457	450	400	57	27	423	318	220	1,282	11,1	16,9	400
OSDR0L101145000	1457	500	450	57	27	466	350	243	1,280	12,1	15,7	400
OSDR0L101146000	1457	600	550	58	27	553	416	288	1,274	14,0	13,4	700
OSDR0L101174500	1744	450	400	57	34	473	356	247	1,273	13,5	8,3	400
OSDR0L101175000	1744	500	450	57	34	523	394	273	1,271	14,8	9,0	700
OSDR0L101176000	1744	600	550	58	34	623	470	326	1,266	17,45	10,3	700
OSDR0L101177500	1744	750	700	63	34	777	583	406	1,259	21,4	12,2	1000

*max electric heating element power suitable for this size

Codes - choice of the connections

[standard and central connection for Elegance Parentesi white and coloured version]

xx = 0L >> Standard connection
xx = AC >> Central connection TC 50 mm

Example: OSDRAC901146000 = Elegance Parentesi coloured H1457, L600, central connection
 OSDROL001146000 = Elegance Parentesi white H1457, L600, standard connection

COLOUR SCHEME

PRODUCT BRACKETS

white	white
coloured	chromed
chromed	chromed

Spare parts

Brackets



XTB Brackets included

Spare part code 99AT0040	white
Spare part code 99AT0045	chromed

Features

Technical characteristics


- Pipes Ø25 mm
- Semi-oval collectors 40x30 mm
- Pipes distance 41 mm
- Max working pressure = 10 bar
- Test pressure = 13 bar
- Max working temperature = 110°C
- For NF certification, see www.certita.fr

Standard equipment

- 3 x 1/2" connections, internal thread (two bottom connections, one top connection)
- 1/2" air vent
- Kit of 4 brackets

Special Versions

- Electric Elegance Parentesi: available
- Electrification kit (for mixed use) available on request: kit with ON/OFF switch (class 1) and Schuko plug; kit with analogue (class 2) or digital (class 2) room thermostat and remote control unit (a kit with heating element only is also available) - the maximum outputs of the kit for each size are given in the table on the facing page
- Chromed product: available
- Coloured version: available
- One-pipe system (see Technical Info pages): yes
- Central connection: available, with 1/2" connections and tappings centre 50mm internal thread only for Elegance Parentesi white and coloured
- Side connections: not available
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately

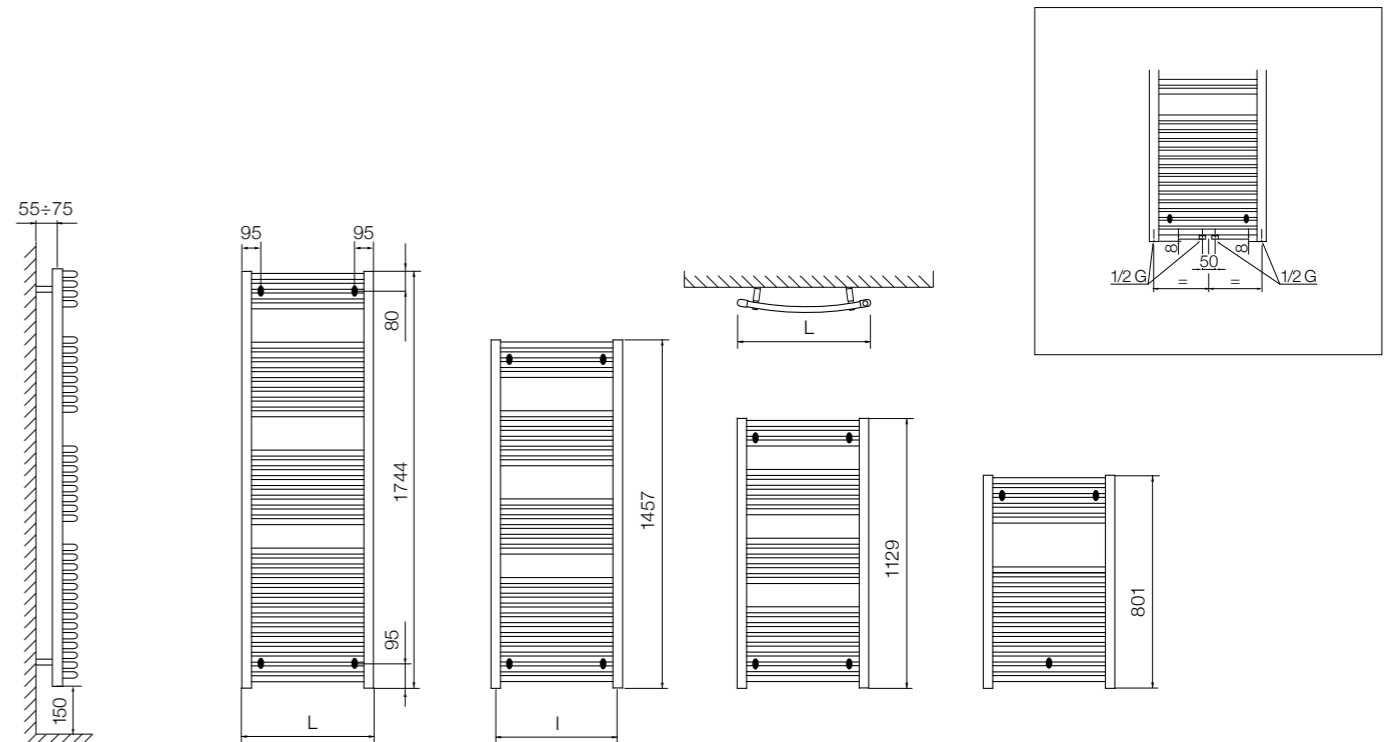

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate [regarding tubes and of the "openings" between the tubes themselves]